

LOCTITE® PC 7317

Known as LOCTITE® Nordbak® Pneu-Wear™
June 2020

PRODUCT DESCRIPTION

LOCTITE® PC 7317 provides the following product characteristics:

Technology	Epoxy
Chemical Type	Epoxy
Appearance (Resin)	Grey ^{LMS}
Appearance (Hardener)	Grey ^{LMS}
Components	Two components - requires mixing
Mix Ratio, by weight - Resin : Hardener	4 : 1
Mix Ratio, (by volume) Resin : Hardener	4 : 1
Cure	Room temperature cure
Application	Abrasion resistance
Specific Benefits	• Small ceramic bead filled - resists fine particle abrasion • Prolongs equipment life • Easy to mix and use • Renews worn surfaces fast - reduces downtime • Non sag - provides abrasion resistance on over-head and vertical surfaces

LOCTITE® PC 7317 is a small ceramic bead filled two-part epoxy putty, designed to protect equipment from fine particle abrasion in wet and dry service. Typical applications include providing a protective lining in pneumatic conveyor systems and repairing and providing abrasion resistance in elbows, slurry pumps, hoppers, cyclones and dust collectors under service temperatures of -30 to 120°C (-20 to 250F).

TYPICAL PROPERTIES OF UNCURED MATERIAL

Resin:

Weight per volume kg/L 2.02 to 2.15
 (lbs/gal) (16.8 to 17.9^{LMS})

Flash Point - See SDS

Hardener:

Weight per volume kg/L 2.07 to 2.19
 (lbs/gal) (17.2 to 18.2^{LMS})

Flash Point - See SDS

Mixed:

Density @ 23 °C, g/cm³ 2.02

Coverage 0.8 m² @ 0.63 cm thick/11 kg
 (8.7 ft² @ 0.25 inch thick/25 lb)

Flash Point - See SDS

TYPICAL CURING PERFORMANCE

Curing Properties

Working Time @ 25 °C, minutes 30
Gel Time @ 25 °C, minutes 35 to 55^{LMS}
Cure Time @ 25 °C, hours 6

Time until Hard to touch (Shore D = 20), @ 23°C, minutes:


2.5 cm (1 in) surface depth 75
5 cm (2 in) surface depth 65
7.5 cm (3 in) surface depth 60
15 cm (6 in) surface depth 55

Finishing Time (time material can be smoothed), @23°C, minutes:

2.5 cm (1 in) surface depth 60
5 cm (2 in) surface depth 55
7.5 cm (3 in) surface depth 50
15 cm (6 in) surface depth 45


Hardness

The graph below shows the development of hardness as a function of time and surface thickness. Surface thicknesses were 2.5 cm (1 in), 5 cm (2 in), 7.5 cm (3 in), and 15 cm (6 in).

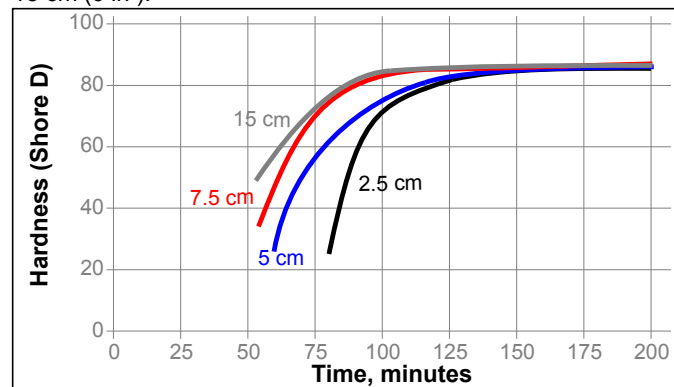


Cure Speed vs. Temperature

The graph below shows the compressive shear strength developed with time at different temperatures and tested according to ISO 604.

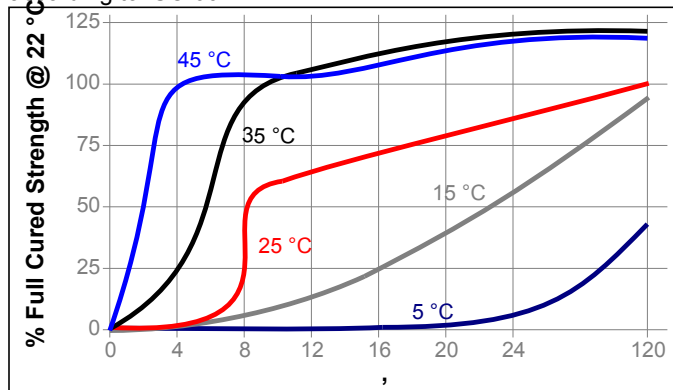

Heat Aging

Aged at temperature indicated and tested @ 22 °C

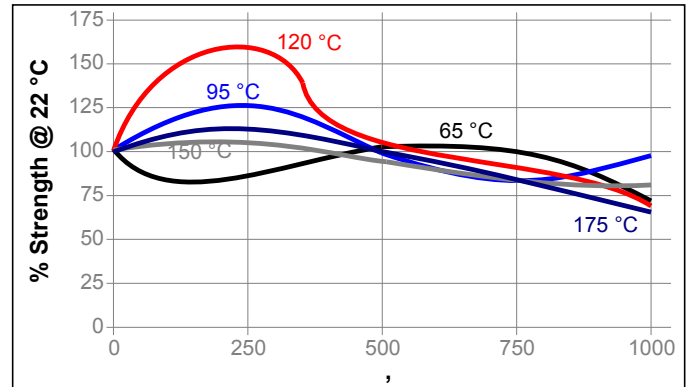

TYPICAL PROPERTIES OF CURED MATERIAL

Physical Properties:

Hardness (Shore D), ASTM D2240	86
Coefficient of Thermal Conductivity ASTM F 433, W/(m·K)	0.891
Glass Transition Temperature ISO 11359-2, °C	61
Coefficient of Thermal Expansion, ISO 11359-2, K ⁻¹ :	
Below Tg	25×10 ⁻⁶
Above Tg	78×10 ⁻⁶

Compressive Strength, ISO 604	N/mm ² 103
	(psi) (14,900)
Compressive Modulus, ISO 604	N/mm ² 5,120
	(psi) (742,200)
Tensile Strength, ISO 527-2	N/mm ² 17.5
	(psi) (2,550)
Tensile Modulus, ISO 527-2	N/mm ² 6,610
	(psi) (958,600)
Elongation at break, %	0.3

Flexural strength, ASTM D790	N/mm ² 56
	(psi) (8,150)
Flexural modulus, ASTM D790	N/mm ² 5,410
	(psi) (784,620)

Electrical Properties:

Volume Resistivity, IEC 60093, ohm-cm	20×10 ¹²
Surface Resistivity, IEC 60093, ohms	1.1×10 ¹⁵

TYPICAL PERFORMANCE OF CURED MATERIAL

Tensile Lap Shear Strength, :	
Grit Blasted Mild Steel (GBMS)	N/mm ² 5.5
	(psi) (795)


TYPICAL ENVIRONMENTAL RESISTANCE

Tensile Lap Shear Strength, :	
Grit Blasted Mild Steel (GBMS)	

Hot Strength

Tested at temperature

Compressive Shear Strength, ISO 604

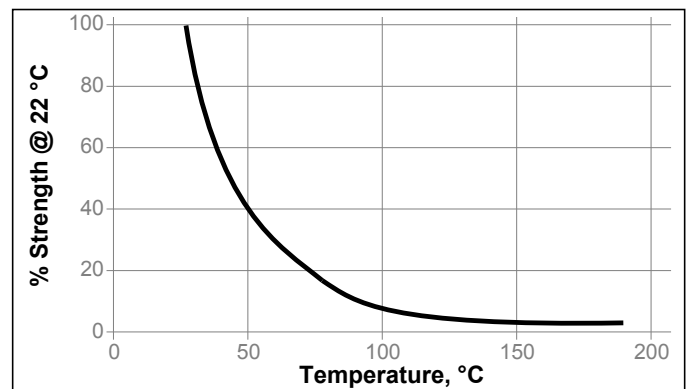

GENERAL INFORMATION

This product is not recommended for use in pure oxygen and/or oxygen rich systems and should not be selected as a sealant for chlorine or other strong oxidizing materials.

For safe handling information on this product, consult the Safety Data Sheet (SDS).

Directions For Use:

Surface Preparation

Proper surface preparation is critical to the long-term performance of this product. The exact requirements vary with the severity of the application, expected service life, and initial substrate conditions.

1. Thoroughly clean and abrade surfaces (grit blast if possible), finally clean with a Loctite® cleaning solvent, e.g. Loctite® SF 7063™ or Loctite® SF 7070. The more thorough the degree of surface preparation the better the performance of the application.
2. Optionally, a low viscosity epoxy material such as Loctite® 7227™ or Loctite® Brushable Ceramic™ may be used

as a primer on the surface.

- On vertical or overhead areas, it is recommended to tack expanded metal mesh to substrate before application of LOCTITE® PC 7317.

Mixing:

- Measure 4 parts resin to 1 parts hardener by volume or weight.
- Transfer measured quantities or entire kit onto a clean and dry mixing surface and mix together with a trowel until uniform in color.
- If mixing larger quantities, a spiral mixing blade attached to a high torque electric or pneumatic drill can be used.
- If resin and hardener temperatures are 15 °C or below, preheat resin only to about 32 °C but not to exceed 38 °C.

Application Method:

- Apply fully mixed material to the prepared surface.
- With gloved hand, take a 25mm (1in) ball of mixed material and rub the surface to apply a scratch coat. By wetting out the surface, it ensures the best possible surface contact and avoids air entrapment.
- Build up to desired thickness (minimum 6 mm), avoid air entrapment.
- At 25 °C working time is 30 minutes and functional cure time is 6 hours.

Smoothing:

If a smooth surface is desired, there are three possible ways to accomplish it.

- For small or curved areas, apply a small amount of isopropanol alcohol or acetone to the top of the compound and smooth using either a gloved hand or trowel, as the solvent prevents sticking. Do not use water as it produces a white film on the finished surface and do not mix the solvent into the epoxy.
- For large or flat areas, a sheet of non-stick Polyethylene or Polypropylene can be applied to the surface. Once the material has been cured, it can be pulled off, leaving a smooth surface.
- A top coat of Brushable Ceramic can be applied on the surface once cured. Ideally, this should be done while the surface is still tacky.

Caution: Use approved, positive-pressure, supplied-air respirator when welding or torch cutting near cured compound. Use approved self-contained breathing apparatus when burning, welding, or torch cutting indoors near cured compound. Use approved respirator for dusts and mists when grinding or machining cured compound. **DO NOT** use open flame on compound. See other cautions on Material Safety Data Sheet.

Technical Tips for Working With Epoxies

Working time and cure depends on temperature and mass:

- The higher the temperature, the faster the cure.
- The larger the mass of material, the faster the cure.

To speed the cure of epoxies at low temperatures:

- Store epoxy at room temperature.
- Pre-heat repair surface until warm to the touch.

To slow the cure of epoxies at high temperatures:

- Mix epoxy in small masses to prevent rapid curing.

- Cool resin/hardener component(s).

Loctite Material Specification^{LMS}

LMS dated July 03, 2001 (Resin) and LMS dated July 03, 2001 (Hardener). Test reports for each batch are available for the indicated properties. LMS test reports include selected QC test parameters considered appropriate to specifications for customer use. Additionally, comprehensive controls are in place to assure product quality and consistency. Special customer specification requirements may be coordinated through Henkel Loctite Quality.

Storage

Store product in the unopened container in a dry location. Storage information may be indicated on the product container labeling.

Optimal Storage: 8 °C to 21 °C. Storage below 8 °C or greater than 28 °C can adversely affect product properties.

Material removed from containers may be contaminated during use. Do not return product to the original container. Henkel Corporation cannot assume responsibility for product which has been contaminated or stored under conditions other than those previously indicated. If additional information is required, please contact your local Technical Service Center or Customer Service Representative.

Conversions

$$(^{\circ}\text{C} \times 1.8) + 32 = ^{\circ}\text{F}$$

$$\text{kV/mm} \times 25.4 = \text{V/mil}$$

$$\text{mm} / 25.4 = \text{inches}$$

$$\mu\text{m} / 25.4 = \text{mil}$$

$$\text{N} \times 0.225 = \text{lb}$$

$$\text{N/mm} \times 5.71 = \text{lb/in}$$

$$\text{N/mm}^2 \times 145 = \text{psi}$$

$$\text{MPa} \times 145 = \text{psi}$$

$$\text{N}\cdot\text{m} \times 8.851 = \text{lb}\cdot\text{in}$$

$$\text{N}\cdot\text{m} \times 0.738 = \text{lb}\cdot\text{ft}$$

$$\text{N}\cdot\text{mm} \times 0.142 = \text{oz}\cdot\text{in}$$

$$\text{mPa}\cdot\text{s} = \text{cP}$$

Note:

The information provided in this Technical Data Sheet (TDS) including the recommendations for use and application of the product are based on our knowledge and experience of the product as at the date of this TDS. The product can have a variety of different applications as well as differing application and working conditions in your environment that are beyond our control. Henkel is, therefore, not liable for the suitability of our product for the production processes and conditions in respect of which you use them, as well as the intended applications and results. We strongly recommend that you carry out your own prior trials to confirm such suitability of our product. Any liability in respect of the information in the Technical Data Sheet or any other written or oral recommendation(s) regarding the concerned product is excluded, except if otherwise explicitly agreed and except in relation to death or personal injury caused by our negligence and any liability under any applicable mandatory product liability law.

In case products are delivered by Henkel Belgium NV, Henkel Electronic Materials NV, Henkel Nederland BV, Henkel Technologies France SAS and Henkel France SA please additionally note the following:

In case Henkel would be nevertheless held liable, on whatever legal ground, Henkel's liability will in no event exceed the amount of the concerned delivery.

In case products are delivered by Henkel Colombiana, S.A.S. the following disclaimer is applicable:

The information provided in this Technical Data Sheet (TDS) including the recommendations for use and application of the product are based on our knowledge and experience of the product as at the date of this TDS. Henkel is, therefore, not liable for the suitability of our product for the production processes and conditions in respect of which you use them, as well as the intended applications and results. We strongly recommend that you carry out your own prior trials to confirm such suitability of our product.

Any liability in respect of the information in the Technical Data Sheet or any other written or oral recommendation(s) regarding the concerned product is excluded, except if otherwise explicitly agreed and except in relation to death or personal injury caused by our negligence and any liability under any applicable mandatory product liability law.

In case products are delivered by Henkel Corporation, Resin Technology Group, Inc., or Henkel Canada Corporation, the following disclaimer is applicable:

The data contained herein are furnished for information only and are believed to be reliable. We cannot assume responsibility for the results obtained by others over whose methods we have no control. It is the user's responsibility to determine suitability for the user's purpose of any production methods mentioned herein and to adopt such precautions as may be advisable for the protection of property and of persons against any hazards that may be involved in the handling and use thereof. In light of the foregoing, **Henkel Corporation specifically disclaims all warranties expressed or implied, including warranties of merchantability or fitness for a particular purpose, arising from sale or use of Henkel Corporation's products. Henkel Corporation specifically disclaims any liability for consequential or incidental damages of any kind, including lost profits.** The discussion herein of various processes or compositions is not to be interpreted as representation that they are free from domination of patents owned by others or as a license under any Henkel Corporation patents that may cover such processes or compositions. We recommend that each prospective user test his proposed application before repetitive use, using this data as a guide. This product may be covered by one or more United States or foreign patents or patent applications.

Trademark usage

Except as otherwise noted, all trademarks in this document are trademarks of Henkel Corporation in the U.S. and elsewhere. ® denotes a trademark registered in the U.S. Patent and Trademark Office.

Reference 0.3